



BRIGHTBOOT®

NOW YOU SEE US

The World's First 360° Hi-Visibility Safety Boot





a new era

IN SAFETY FOOTWEAR

CONSTRUCTION

NUCLEAR & ENERGY

OIL & GAS

UTILITIES

FACILITIES MAINTENANCE

INFRASTRUCTURE

ROAD

RAIL

TRANSPORT

AIRPORTS

AGRICULTURE

RECYCLING

WASTE MANAGEMENT

GROUNDWORKS

SURVEYING

INDUSTRIAL CLEANING

MINING

SECURITY

A safety workwear boot designed and manufactured to withstand the harshest of conditions and is suitable for wear in all weathers, waterproof, windproof and breathable.

A composite protective toe cap and Kevlar perforation resistant insole, ensure Brightboot are 100% metal free and anti-magnetic. Built by hand using the highest quality materials available.

Brightboot delivers assured protection in line with safety standard EN ISO 20345:2011.

Brightboot is innovative, combining the ultimate safety with high visibility.

Using a high visibility waterproof neoprene upper compliant to relevant tests within the standard EN ISO 20471:2013 for Yellow and Orange, RIS-3279-TOM for Orange and EN1150:1999 for Pink.

The addition of retro reflective segmented silver bands and other retro reflective elements, ensure that the wearer will remain visible in low light, sunlight, adverse weather conditions and at night (from an illuminated source).

Brightboot is available in 3 sizes, High Leg (below the knee), Rigger (mid calf) and Ankle (above the ankle).



**PRODUCT INNOVATION AWARD 2019,
BRITISH SAFETY INDUSTRY FEDERATION**

TECHNICAL performance

The Worlds first hi-visibility 360° safety boot, designed and manufactured with innovative technical performance in mind to create, the most comfortable safety boot available today, that can withstand the harshest of working conditions.



STAY SAFE



STAY SEEN

360° HI VISIBILITY

In daylight, lowlight and at night:
EN ISO 20345 S5 HRO CI HI SRA
EN ISO 20471
RIS-3279-TOM
EN 1150



HYDRO CONTROL

2mm airmesh network wicks saturated air to the exterior of the boot.

100% WATERPROOF

Fully waterproof to the very top of the boot.

THERMAL DEFENCE

A boot for all temperatures including thermal protection down to -40°C.

CRUSH PROTECTION

Fibre glass non-metallic toe cap:
200J EN 12568

RESISTANT

Resistant to fuel oil and hydrocarbons.

ANTI-FATIGUE

Designed for all day wear; supports natural posture and spinal alignment, reducing wear and tear on lumbar vertebrae.

STABILITY & ANTI-SLIP

Excellent stability on rough/ uneven ground. Superb grip on typically hazardous surfaces such as wet rock and wooden sleepers.

PIERCE PROTECTION

Flexible Kevlar non-metallic penetration resistant midsole:
1100N EN 12568





STAY SAFE
EN ISO 20345:2011



STAY SEEN
EN ISO 20471:2013
MATERIALS



bright YELLOW



100%
WATERPROOF



COMPOSITE
PROTECTIVE
TOE CAP



KEVLAR
PERFORATION
RESISTANT INSOLE



360°
VISIBILITY



OIL AND
HYDROCARBON
RESISTANT



SHOCK
ABSORBING
HEEL AREA



ANTI-STATIC



5mm NEOPRENE
SOCK LINER



ANTI-SLIP



HEAT RESISTANT
OUTSOLE



2mm AIRMESH
FIBRE NETWORK



SAFETY STANDARD
APPROVED

Brightboot Yellow High Leg

Product Code:
BBTY

Size Range	UK 8 - 13
Colour	Black / Yellow
Weight (single)	1.5 kilos
Construction	Cement
Product Certification	EN ISO 20345:2011 S5 HRO CI HI SRA
Upper Neoprene Material Certification	Compliant to relevant tests within the standard EN ISO 20471:2013 + AI:2016
Silver Reflective Elements Certification	3M 5510 Materials Compliant to EN ISO 20471



Brightboot Yellow Rigger

Product Code:
BBMY

Size Range	UK 8 - 13
Colour	Black / Yellow
Weight (single)	1.3 kilos
Construction	Cement
Product Certification	EN ISO 20345:2011 S5 HRO CI HI SRA
Upper Neoprene Material Certification	Compliant to relevant tests within the standard EN ISO 20471:2013 + AI:2016
Silver Reflective Elements Certification	3M 5510 Materials Compliant to EN ISO 20471



Brightboot Yellow Ankle

Product Code:
BBLY

Size Range	UK 8 - 13
Colour	Black / Yellow
Weight (single)	1.2 kilos
Construction	Cement
Product Certification	EN ISO 20345:2011 S5 HRO CI HI SRA
Upper Neoprene Material Certification	Compliant to relevant tests within the standard EN ISO 20471:2013 + AI:2016
Silver Reflective Elements Certification	3M 5510 Materials Compliant to EN ISO 20471





STAY SAFE
EN ISO 20345:2011



STAY SEEN
EN ISO 20471:2013
MATERIALS



bright ORANGE



100%
WATERPROOF



COMPOSITE
PROTECTIVE
TOE CAP



KEVLAR
PERFORATION
RESISTANT INSOLE



360°
VISIBILITY



OIL AND
HYDROCARBON
RESISTANT



SHOCK
ABSORBING
HEEL AREA



ANTI-STATIC



5mm NEOPRENE
SOCK LINER



ANTI-SLIP



HEAT RESISTANT
OUTSOLE



2mm AIRMESH
FIBRE NETWORK



SAFETY STANDARD
APPROVED

Brightboot Orange High Leg

Product Code:
BBTO

Size Range	UK 8 - 13
Colour	Grey / Orange
Weight (single)	1.5 kilos
Construction	Cement
Product Certification	EN ISO 20345:2011 S5 HRO CI HI SRA
Upper Neoprene Material Certification	Compliant to relevant tests within the standard EN ISO 20471:2013 and RIS-3279-TOM
Silver Reflective Elements Certification	3M 5510 Materials Compliant to EN ISO 20471



Brightboot Orange Rigger

Product Code:
BBMO

Size Range	UK 8 - 13
Colour	Grey / Orange
Weight (single)	1.3 kilos
Construction	Cement
Product Certification	EN ISO 20345:2011 S5 HRO CI HI SRA
Upper Neoprene Material Certification	Compliant to relevant tests within the standard EN ISO 20471:2013 and RIS-3279-TOM
Silver Reflective Elements Certification	3M 5510 Materials Compliant to EN ISO 20471



Brightboot Orange Ankle

Product Code:
BBLO

Size Range	UK 8 - 13
Colour	Grey / Orange
Weight (single)	1.2 kilos
Construction	Cement
Product Certification	EN ISO 20345:2011 S5 HRO CI HI SRA
Upper Neoprene Material Certification	Compliant to relevant tests within the standard EN ISO 20471:2013 and RIS-3279-TOM
Silver Reflective Elements Certification	3M 5510 Materials Compliant to EN ISO 20471





STAY SAFE
EN ISO 20345:2011



STAY SEEN
EN ISO 20471:2013
MATERIALS

bright PINK



100%
WATERPROOF



COMPOSITE
PROTECTIVE
TOE CAP



KEVLAR
PERFORATION
RESISTANT
INSOLE



360°
VISIBILITY



OIL AND
HYDROCARBON
RESISTANT



SHOCK
ABSORBING
HEEL AREA



ANTI-STATIC



5mm NEOPRENE
SOCK LINER



ANTI-SLIP



HEAT RESISTANT
OUTSOLE



2mm AIRMESH
FIBRE NETWORK



SAFETY STANDARD
APPROVED

Brightboot Pink High Leg

Product Code:
BBTP

Size Range	UK 4 - 9
Colour	Navy / Pink
Weight (single)	1.4 kilos
Construction	Cement
Product Certification	EN ISO 20345:2011 S5 HRO CI HI SRA
Upper Neoprene Material Certification	Compliant to relevant tests within the standard EN 1150
Silver Reflective Elements Certification	3M 5510 Materials Compliant to EN ISO 20471



Brightboot Pink Rigger

Product Code:
BBMP

Size Range	UK 4 - 9
Colour	Navy / Pink
Weight (single)	1.2 kilos
Construction	Cement
Product Certification	EN ISO 20345:2011 S5 HRO CI HI SRA
Upper Neoprene Material Certification	Compliant to relevant tests within the standard EN 1150
Silver Reflective Elements Certification	3M 5510 Materials Compliant to EN ISO 20471



Brightboot Pink Ankle

Product Code:
BBLP

Size Range	UK 4 - 9
Colour	Navy / Pink
Weight (single)	1.1 kilos
Construction	Cement
Product Certification	EN ISO 20345:2011 S5 HRO CI HI SRA
Upper Neoprene Material Certification	Compliant to relevant tests within the standard EN 1150
Silver Reflective Elements Certification	3M 5510 Materials Compliant to EN ISO 20471






360°

HI-VISIBILITY

- 1 Anti-entanglement pull on loop with 3M retro reflective tape
- 2 3M silver retro-reflective laser cut Brightboot logo
- 3 3M solid retro reflective vertical straps front and back
- 4 Segmented retro-reflective silver horizontal bands, compliant to **EN ISO 20471:2013**
- 5 5mm thick neoprene upper available in high visibility Bright Yellow or Bright Orange compliant to relevant tests within the standard **EN ISO 20471:2013**

Also available in Bright Pink compliant to relevant tests within the standard **EN 1150:1999**
- 6 Fluorescent rubber foxing in Bright Yellow, Bright Orange and Bright Pink

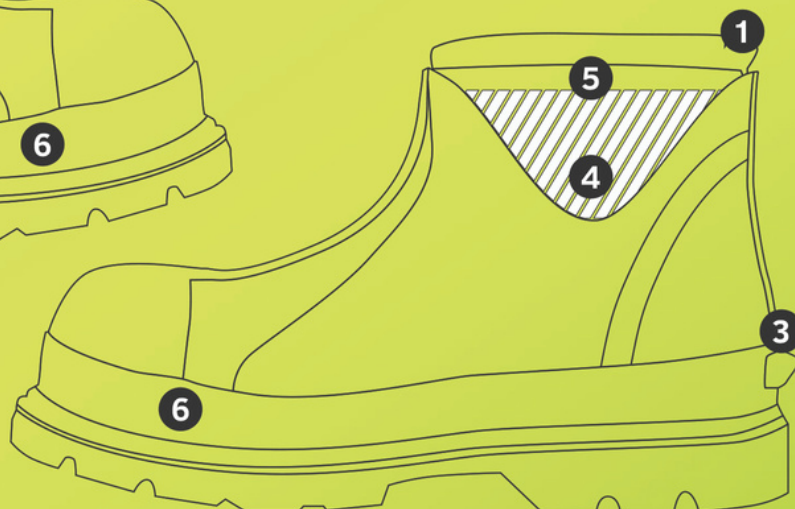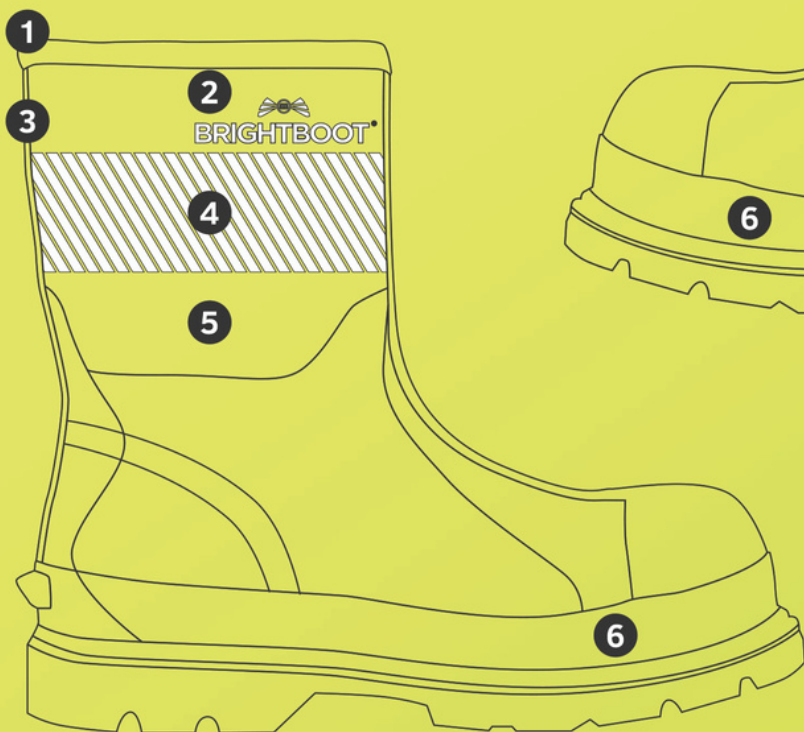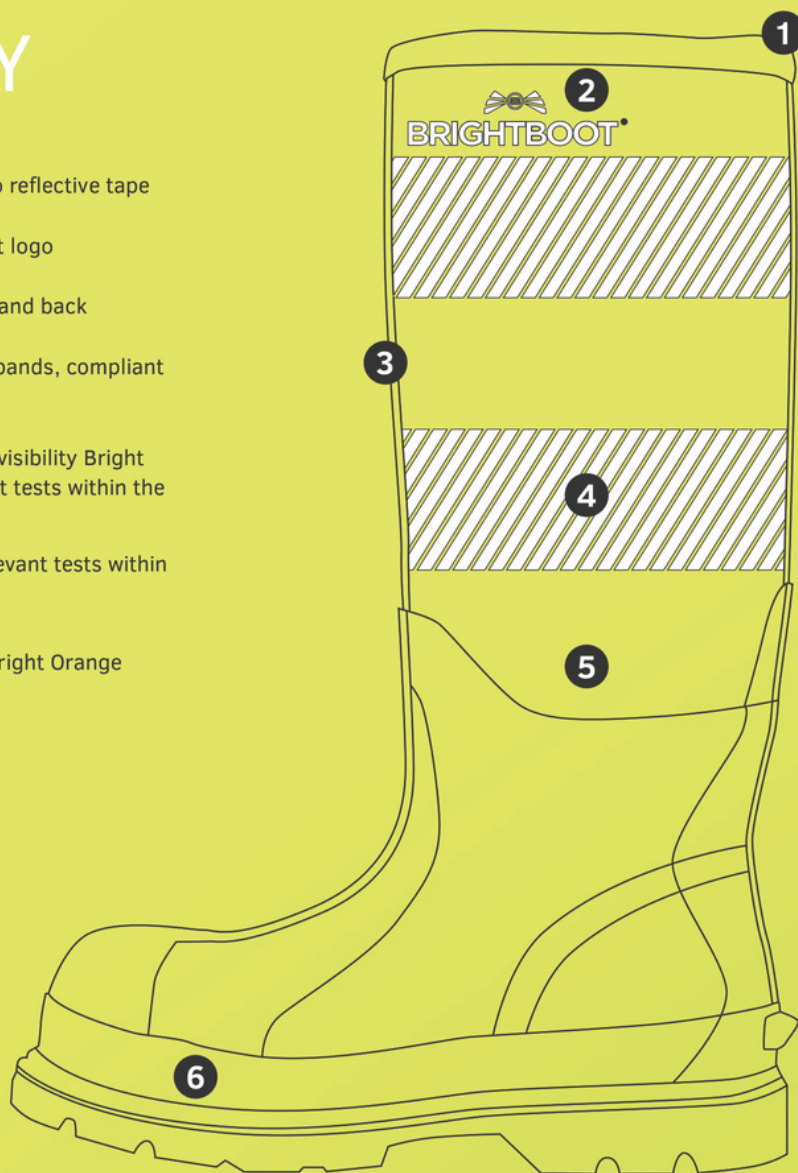


technical PROPERTIES

- World First Innovation.
- 360 degree hi-visibility in daylight, lowlight and at night.
- 100% non-metallic construction, anti-magnetic.
- Anti-static certified to ISO 20344:2011.
- Fully waterproof (WR) to the top of the boot.
- Heat resistant outsole to 300 degrees centigrade (HRO).
- Abrasion resistant outsole, certified to ISO 20344:2011.
- Slip resistant outsole (SRA).
- 5mm neoprene sock liner, thermally insulating to -50 degrees centigrade (CI).
- 2mm airmesh fibre network, with hydro control.
- Kevlar penetration resistant insole, conforms to EN 12568.
- Fibreglass protective toe cap, non-conductive of current or temperature, conforms to EN 12568.
- Heat insulation to 150 degrees centigrade (HI).
- Resistant to fuel oil and hydrocarbons.
- Resistant to vegetable oils, fats and oleic acid.
- Anti-entanglement pull on loop.
- Supports natural posture and spinal alignment, reducing wear and tear on lumbar vertebrae. Anti-fatigue, contoured PU insole absorbs shocks from hard surfaces such as concrete. Takes the the pressure of your feet, joints and back.
- Reduced fatigue, extra space inside the toe cap, allows the toes to spread and handle load when walking.

internal MEASUREMENTS

Supreme comfort underfoot, ergonomic ankle support, designed for all day wear.

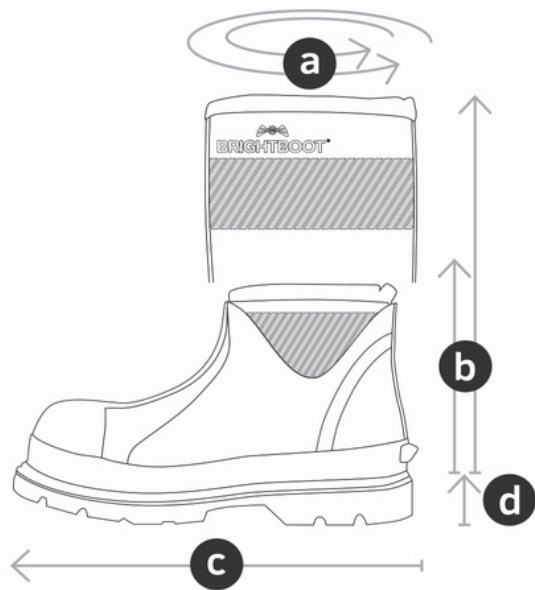

UK SIZE / EURO SIZE	4/37	5/38	6/39	7/40-41	8/42	9/43	10/44	11/45-46	12/47	13/48
BRIGHTBOOT HIGH LEG										
a Circumference of boot opening (cm)	40.9	41.2	41.9	42.6	43.3	43.9	44.7	45.2	45.9	46.5
b Internal height (cm)	38	38.5	38.5	38.5	38.5	38.5	39.5	39.5	39.5	39.5
c Heel to toe internal (cm)	24.9	25.8	26.6	27.5	28.3	29.2	30	30.8	31.7	32.5
d Heel height (cm)	3	3	3	3	3	3	3	3	3	3
BRIGHTBOOT RIGGER										
a Circumference of boot opening (cm)	36.5	36.5	36.5	37.5	37.5	37.5	37.5	39	39	39
b Internal height (cm)	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5	24.5
c Heel to toe internal (cm)	24.9	25.8	26.6	27.5	28.3	29.2	30	30.8	31.7	32.5
d Heel height (cm)	3	3	3	3	3	3	3	3	3	3
BRIGHTBOOT ANKLE										
a Circumference of boot opening (cm)	25.4	26.2	26.9	27.7	28.5	29.3	30.1	30.8	31.6	32.4
b Internal height (cm)	18	18	18	18	18	18	18	18	18	18
c Heel to toe internal (cm)	24.9	25.8	26.6	27.5	28.3	29.2	30	30.8	31.7	32.5
d Heel height (cm)	3	3	3	3	3	3	3	3	3	3